


SD 20 2PSO

2 Panel Side-Opening



Slycma Creation 2025 - Photos by Fabrice Ferrer - Slycma - Photos and illustrations are non-contractual.
Subject to change. Reproduction, even partial, is prohibited.

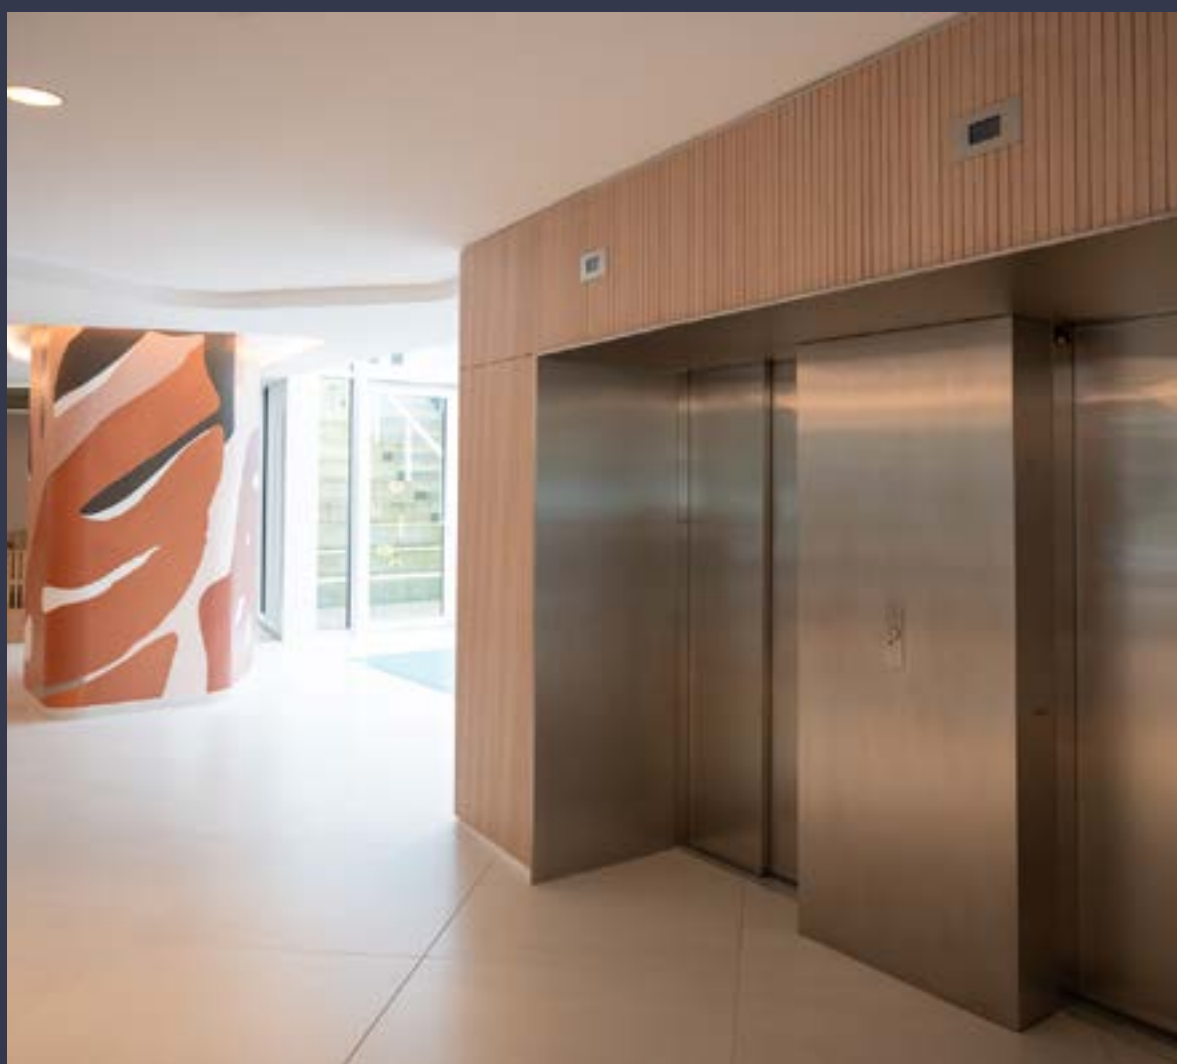

We've got the perfect door to suit your lift !



Creation



Modernisation

Automatic landing doors

- 1.5 mm thick steel sheet
- Reinforced mechanism with solid steel guide rail
- Trolleys in 3.0 mm thick steel sheet
- Reinforced panels
- Opaque glass option available
- Inter-panel linkage via chicanes



2PSO Landing door overall dimensions

Dimensions in mm

	Clear opening (PL)	700	800	900	1000	1100	1200	1300
	Clear height (HL)	2000 - 2100 -2200 - 2300						
Modernisation	Lintel height	210						
	Reduced frame overall dimensions	1250	1400	1550	1700	1850	2000	2150
	Full entrance overall dimensions	1300	1450	1550	1700	1850	2000	2150
Creation	Rough opening for reduced frame	1050	1150	1250	1350	1450	1550	1650
	Rough opening for full entrance	1350	1500	1600	1750	1900	2050	2200
	Rough opening height	HL + 240						

Car doors


Clear opening (PL)	700	800	900	1000	1100	1200	1300
Clear height (HL)	2000 - 2100 -2200 - 2300						
Operator overall dimensions	1090	1240	1390	1540	1690	1840	1990
Overall dimensions with car door locking device	1171,5	1321,5	1471,5	1621,5	1771,5	1921,5	2071,5
Operator height	417,5						
Height under console	HL + 220						
Sill width	90						

THE SD 20 RANGE


Finishes




RAL 7032 Primer



Brushed stainless steel



Leather-grain stainless steel



Linen-textured stainless steel

Other finishes
Please contact us

Key benefits

- ✓ EN 81-20/50 standard as the guiding principle for its design
- ✓ Designed to meet customer expectations for a long-lasting product
- ✓ Quiet operation
- ✓ Flawless aesthetics and the use of AISI 304 stainless steel
- ✓ Easy and quick maintenance
- ✓ Proven reliability and durability
- ✓ Core range available from stock

Certifications

Certifications	SD20
EN 81-20 / 50	✓
2014/33/UE	✓
EN 81-58	✓
EN 81-70	✓
EN 81-71	✓

Environments

Hotels

Social housing

Airports

Hospitals

Private residential

Home lift

Offices

Shopping centres



Slycma is a signatory of the Code of Good Practice established by the French Lift Federation, to which it has belonged since its creation.



Our quality approach :

Certified ISO 9001 and ISO 14001, Slycma is also regularly audited by its customers.

Contact details

LYON Headoffice : 235 rue du Général de Gaulle - 69530 Brignais - Tél. : +33 (0)4 78 86 81 00 - slycma@slycma.com

PARIS Agencies : 34 route de Longjumeau - 91380 Chilly Mazarin - Tél. : +33 (0)1 69 79 32 10 - magasin.mazarin@slycma.com

16 rue Maurice Thorez - 93200 SAINT DENIS - Tél. : +33 (0)1 48 23 91 92

SD 20

2 Panel Central Opening



Slycma Creation 2025 - Photos by Fabrice Ferrer - Slycma - Photos and illustrations are non-contractual.
Subject to change. Reproduction, even partial, is prohibited.



We've got the perfect door to suit your lift !



Creation



Modernisation

Automatic landing door

- 1.5 mm thick steel sheet
- Reinforced mechanism with solid steel guide rail
- Trolleys in 3.0 mm thick steel sheet
- Reinforced panels
- Opaque glass option available
- Inter-panel linkage via chicanes



Creation Modernisation	Clear Opening (PL)	700	800	900	1000	1100	1200	1300
	Clear Height (HL)	2000 - 2100 - 2200- 2300						
	Lintel height	210						
	Reduced frame overall dimensions	1504	1704	1904	2104	2304	2504	2704
	Full facade overall dimensions	1600	1740	1900	2100	2300	2500	2700
	Rough opening for reduced frame	1050	1150	1250	1350	1450	1550	1650
	Rough opening for full facade	1650	1790	1950	2150	2350	2550	2750
	Rough opening height	HL + 240						

Car doors

- Reduced operator height
- Reinforced panels in 1.5 mm steel sheet
- Opaque glass option available
- Mechanism support in 3.0 mm steel sheet
- Reinforced mechanism with solid steel guide rail
- Mechanical locking device
- PM motorisation (permanent magnet)
- Toothed belt drive
- Number of annual cycles: > 3,000,000
- Number of starts per hour: > 360



Dimensions in mm


Clear Opening (CO)	700	800	900	1000	1100	1200	1300
Clear Height (CH)	2000 - 2100 -2200 - 2300						
Operator overall dimensions	1470	1670	1870	2070	2270	2470	2670
Operator height	417,5						
Height console	CH + 240						
Sill width	54						

THE SD 20 RANGE


Finishes




RAL 7032 Primer



Brushed stainless steel



Leather-grain stainless steel



Linen-textured stainless steel

Other finishes
Please contact us

Key benefits

- ✔ EN 81-20/50 standard as the guiding principle for its design
- ✔ Designed to meet customer expectations for a long-lasting product
- ✔ Quiet operation
- ✔ Flawless aesthetics and the use of AISI 304 stainless steel
- ✔ Easy and quick maintenance
- ✔ Proven reliability and durability
- ✔ Core range available from stock

Certifications

Certifications	SD20
EN 81-20 / 50	✔
2014/33/UE	✔
EN 81-58	✔
EN 81-70	✔
EN 81-71	✔

Environments

Hotels

Social housing

Airports

Hospitals

Private residential

Home lift

Offices

Shopping centres



Slycma is a signatory of the Code of Good Practice established by the French Lift Federation, to which it has belonged since its creation.



Our quality approach :

Certified ISO 9001 and ISO 14001, Slycma is also regularly audited by its customers.

Contact details

LYON Headoffice : 235 rue du Général de Gaulle - 69530 Brignais - Tél: +33 (0)4 78 86 81 00 - slycma@slycma.com

PARIS Agencies : 34 route de Longjumeau - 91380 Chilly Mazarin - Tél. : +33 (0)1 69 79 32 10 - magasin.mazarin@slycma.com

16 rue Maurice Thorez - 93200 SAINT DENIS - Tél. : +33 (0)1 48 23 91 92