

# GAIA SOLID PANEL

2 Panel Side-Opening landing door



Création SLYCMA 2025 - Photos Fabrice Ferrer - SLYCMA - Photos et illustrations non contractuelles.  
Sous réserve de modifications. Reproductions, même partielle, interdite.



We've got the perfect door to suit your lift !



Creation




Modernisation

# GAIA 2PSO

## Automatic landing doors

### Key features

- Frame thickness 1.5 mm + internal reinforcements
- Panels thickness 1.5 mm + internal reinforcements
- Mechanism support in 2.5 mm galvanised steel
- Upper guide rail in 4 mm protected solid steel
- Trolley in 4 mm galvanised steel
- Aluminium sill in steel cradle
- EN 81-21 contacts (optional)
- Panel closing by counterweight
- Vandal-resistant Level 2 option including :  
Anti-grip sheet + reinforced panels + contact cover  
+ locking of the unlocking triangle.

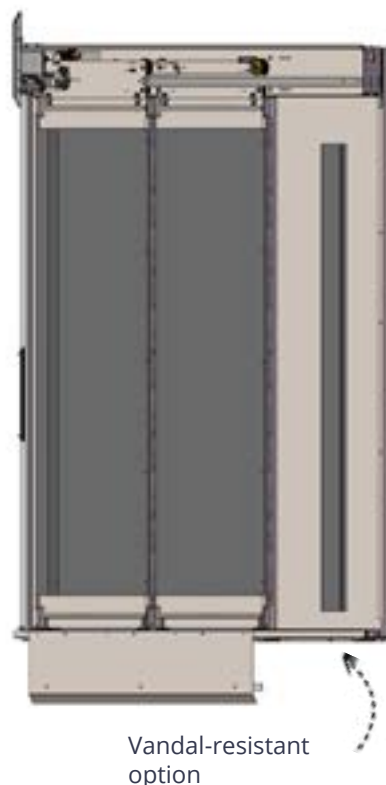

### 2PSO – Landing door overall dimensions

Dimensions in mm

Clear opening (CO)	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1300	1400	1500
Clear Height (CH)	2000 to 3000 depending on the clear opening															
Header height	200															
Reduced frame overall dimensions	1060	1135	1210	1285	1360	1435	1510	1585	1660	1735	1810	1885	1960	2110	2260	2410
Full facade overall dimensions	1060	1135	1210	1285	1360	1435	1510	1585	1660	1735	1810	1885	1960	2110	2260	2410
Structural opening for reduced frame	870	920	970	1020	1070	1120	1170	1200	1270	1320	1370	1420	1470	1570	1670	1770
Structural opening for full facade	1110	1185	1260	1335	1410	1485	1560	1635	1710	1785	1860	1935	2110	2160	2310	2460
Structural opening height	HL + 230 mm															
Door thickness (mm)	155															
Panel return	Counterweight															

# GAIA 2PSO

## Car doors

### Key features

- Panels thickness : 1.5 mm
- Mechanism support in 3.0 mm galvanised steel sheet
- Protected solid steel upper guide rail, 4.0 mm
- Aluminium sill
- Brushless motorisation
- Control and position monitoring : SLYCMA VF control board
- Inter-floor locking device
- Number of starts per hour : > 360
- Vandal-resistant option Level 2 including :  
Anti-climb steel sheet + panel boxing




### 2PSO – Car door overall dimensions

Dimensions in mm


Clear Opening (CO)	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1300	1400	1500
Clear Height (CH)	2000 to 3000 depending on clear opening															
Operator overall dimensions	986	1061	1136	1211	1286	1361	1436	1511	1586	1661	1736	1811	1916	2066	2216	2366
Operator height (mm)	440															
Car door locking																
Fixing height under console	0 mini - 350 maxi															
Operator width	114 (120 including motor)															
Standard sill width	90															
Cells barrier	Fixed															

# THE GAIA RANGE


## Standard finishes



RAL 9005  
standard



Leather-grain  
stainless steel



Linen-textured  
stainless steel



Brushed  
stainless steel

Others finishes  
Please contact us

## Benefits

- Guaranteed aesthetics with no visible spot welding marks
- Wide range of finishes available
- Lintel brushing direction identical to that of the jambs
- Simplified maintenance
- Quiet and robust operation
- Landing doors adaptable to existing retained car doors

## Certifications

Certifications	GAIA
EN 81-58	<b>E 120 - EW 60</b>
EN 81-20 / 50	
EN 81-21	
EN 81-70	
EN 81 - 71 - Cat. 2	
2014/33/UE	

## Environments

Industry

Airports

Hotels

Hospitals

Shopping centers

Offices

Public facilities

Social housing



Slycma is a signatory of the Code of Good Practice established by the French Lift Federation, to which it has belonged since its creation.



**Our quality approach :**

Certified ISO 9001 and ISO 14001, Slycma is also regularly audited by its customers.

### Contact details

**LYON Headoffice :** 235 rue du Général de Gaulle - 69530 Brignais - Tél. : +33 (0)4 78 86 81 00 - slycma@slycma.com

**PARIS Agencies :** 34 route de Longjumeau - 91380 Chilly Mazarin - Tél. : +33 (0)1 69 79 32 10 - magasin.mazarin@slycma.com

16 rue Maurice Thorez - 93200 SAINT DENIS - Tél. : +33 (0)1 48 23 91 92

# GAIA SOLID PANEL

2 Panel Central-Opening Landing door



Création SLYCMA 2025 - Photos Fabrice Ferrer - SLYCMA - Photos et illustrations non contractuelles.  
Sous réserve de modifications. Reproduction, même partielle, interdite.



We've got the perfect door to suit your lift !



Creation




Modernisation

# GAIA 2PCO

## Automatic landing doors

### Key features

- Frame thickness 1.5 mm + internal reinforcements
- Panels thickness 1.5 mm + internal reinforcements
- Mechanism support in 2.5 mm galvanised steel
- Upper guide rail in 4 mm protected solid steel
- Trolley in 4 mm galvanised steel
- Aluminium sill in steel cradle
- EN 81-21 contacts (optional)
- Panel closing by counterweight
- Vandal-resistant Level 2 option including :  
Anti-grip sheet + reinforced panels + contact cover  
+ locking of the unlocking triangle.

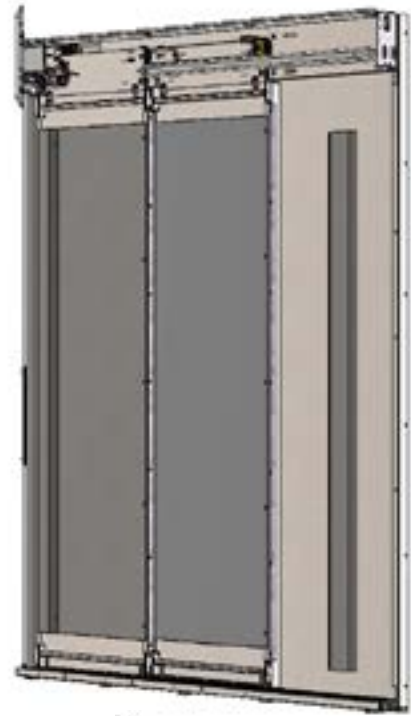

Vandal-resistant option

### 2PCO – Landing door overall dimensions

Dimensions in mm

Clear opening (CO)	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1300	1400	1500
Clear Height (CH)	2000 to 3000 depending on the clear opening															
Header height	200															
Reduced frame overall dimensions	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2700	2900	3100
Full facade overall dimensions	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2700	2900	3100
Structural opening for reduced frame	870	920	970	1020	1070	1120	1170	1220	1270	1320	1370	1420	1470	1570	1670	1770
Structural opening for full facade	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2750	2950	3150
Structural opening height	CH + 230 mm															
Door thickness (mm)	120															
Panel return	Counterweight															

# GAIA 2PCO

## Car doors

### Key features

- Panels thickness : 1.5 mm
- Mechanism support in 3.0 mm galvanised steel sheet
- Protected solid steel upper guide rail, 4.0 mm
- Aluminium sill
- Brushless motorisation
- Control and position monitoring : SLYCMA VF control board
- Inter-floor locking device
- Number of starts per hour : > 360
- Vandal-resistant option Level 2 including :  
Anti-climb steel sheet + panel boxing




### 2PCO – Car door overall dimensions

Dimensions in mm


Clear Opening (CO)	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1300	1400	1500
Clear Height (CH)	2000 to 3000 depending on clear opening															
Operator overall dimensions	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2650	2850	3050
Operator height (mm)	440															
Operator width	114 (120 including motor)															
Car door locking																
Fixing height under console	0 mini - 350 maxi															
Standard sill width	45															
Cells barrier	Fixed															

# THE GAIA RANGE


## Standard finishes



RAL 9005  
standard



Leather-grain  
stainless steel



Linen-textured  
stainless steel



Brushed  
stainless steel

Others finishes  
Please contact us

## Benefits

- Guaranteed aesthetics with no visible spot welding marks
- Wide range of finishes available
- Lintel brushing direction identical to that of the uprights
- Simplified maintenance
- Quiet and robust operation
- Landing doors adaptable to existing retained car doors

## Certifications

Certifications	GAIA
EN 81-58	<b>E 120 - EW 60</b>
EN 81-20 / 50	
EN 81-21	
EN 81-70	
EN 81 - 71 - Cat. 2	
2014/33/UE	

## Environments

Industry

Airports

Hotels

Hospitals

Shopping centers

Offices

Public facilities

Social housing



Slycma is a signatory of the Code of Good Practice established by the French Lift Federation, to which it has belonged since its creation.



**Our quality approach :**

Certified ISO 9001 and ISO 14001, Slycma is also regularly audited by its customers.

### Contact details


**LYON Headoffice :** 235 rue du Général de Gaulle - 69530 Brignais - Tél. : +33 (0)4 78 86 81 00 - slycma@slycma.com

**PARIS Agencies :** 34 route de Longjumeau - 91380 Chilly Mazarin - Tél. : +33 (0)1 69 79 32 10 - magasin.mazarin@slycma.com

16 rue Maurice Thorez - 93200 SAINT DENIS - Tél. : +33 (0)1 48 23 91 92

# GAIA SOLID PANEL

3 Panel Side-Opening Landing door

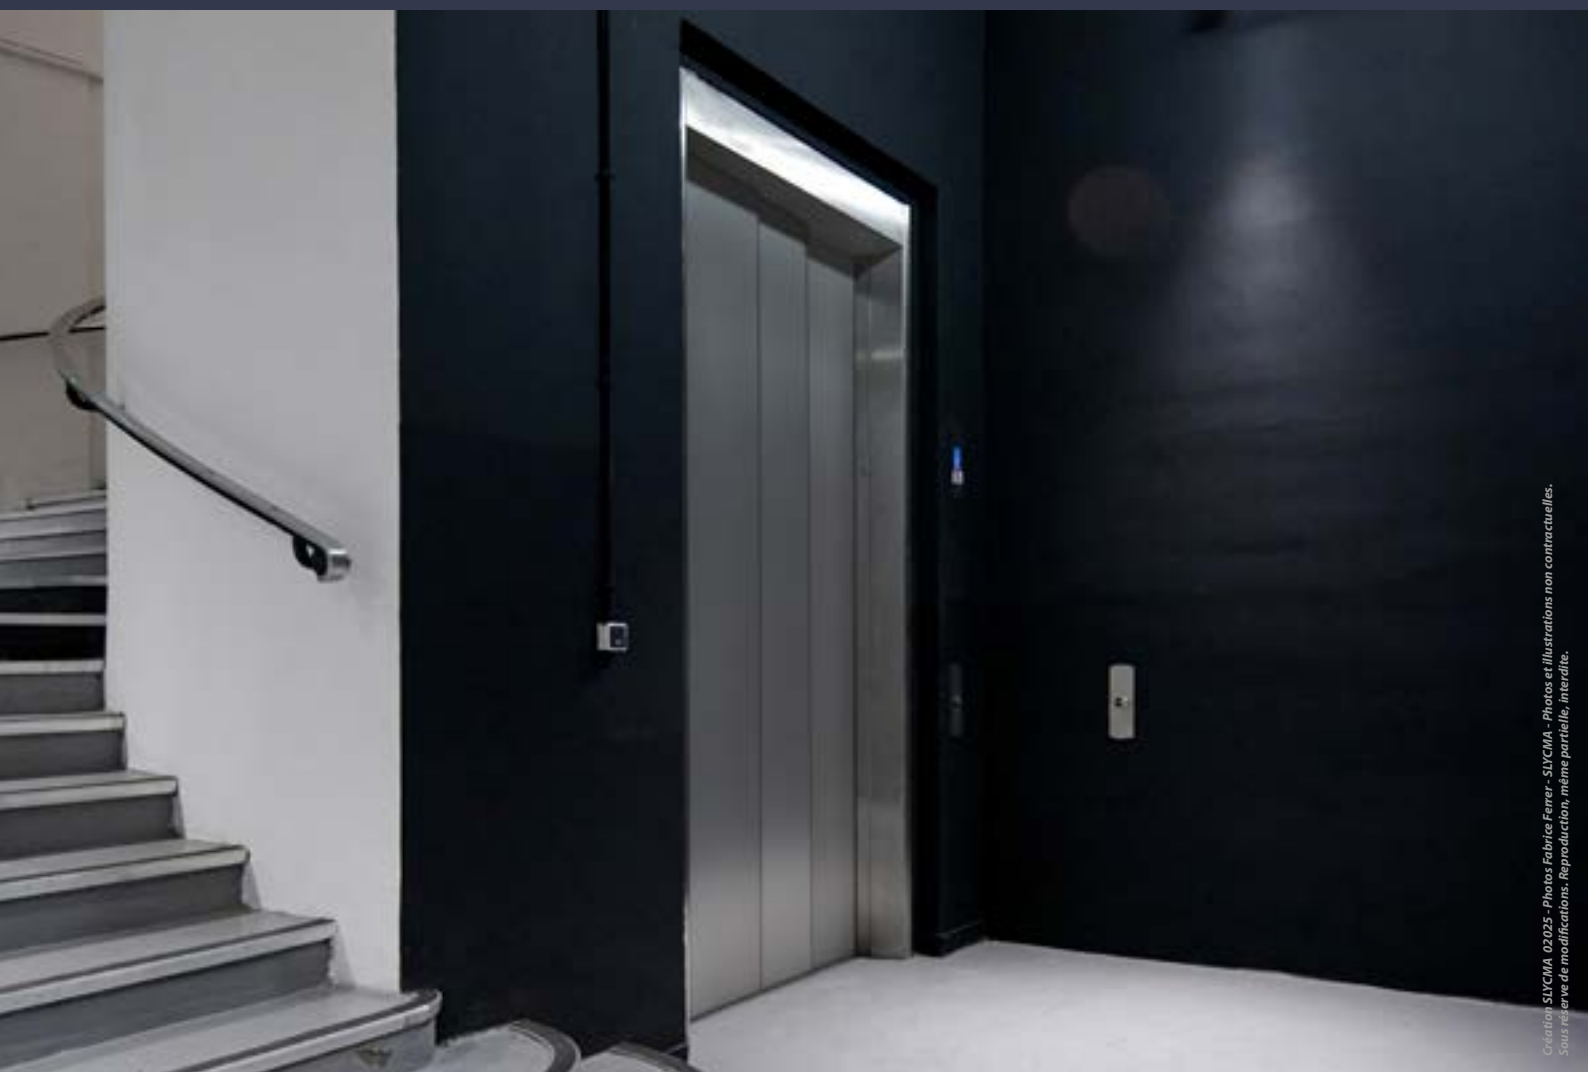

Création SLYCMA 02/025 - Photos Fabrice Ferrer - SLYCMA - Photos et Illustrations non contractuelles.  
Sous réserve de modifications. Reproduction, même partielle, interdite.

We've got the perfect door to suit your lift !



Creation




Modernisation

# GAIA 3PSO

## Automatic landing doors

### Key features

- Frame thickness 1.5 mm + internal reinforcements
- Panels thickness 1.5 mm + internal reinforcements
- Mechanism support in 2.5 mm galvanised steel
- Upper guide rail in 4 mm protected solid steel
- Trolley in 4 mm galvanised steel
- Aluminium sill in steel cradle
- EN 81-21 contacts (optional)
- Panel closing by counterweight
- Vandal-resistant Level 2 option including :  
Anti-grip sheet + reinforced panels + contact cover  
+ locking of the unlocking triangle.

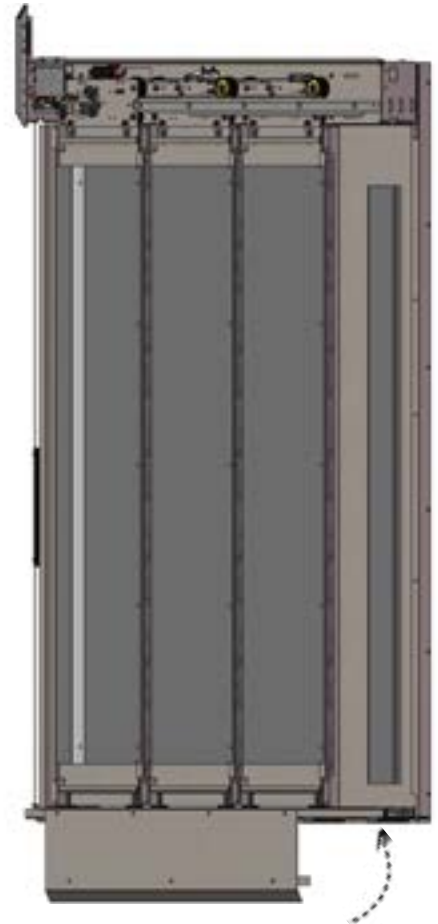

Vandal-resistant option

### 3PSO – Landing door overall dimensions

Dimensions in mm

Clear opening (CO)	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400
Clear Height (CH)	2000 to 3000 depending on the clear opening																	
Header height	200																	
Reduced frame overall dimensions	1093	1226	1360	1493	1626	1760	1893	2026	2160	2293	2426	2560	2693	2826	2960	3093	3226	3360
Full facade overall dimensions	1093	1226	1360	1493	1626	1760	1893	2026	2160	2293	2426	2560	2693	2826	2960	3093	3226	3360
Structural opening for reduced frame	970	1070	1170	1270	1370	1470	1570	1670	1770	1870	1970	2070	2170	2270	2370	2470	2570	2670
Structural opening for full facade	1143	1276	1410	1543	1676	1810	1943	2076	2210	2343	2476	2610	2743	2876	3010	3143	3276	3410
Structural opening height	CH + 230 mm																	
Door thickness (mm)	200																	
Panel return	Counterweight																	

# GAIA 3PSO

## Car doors


### Key features

- Panels thickness : 1.5 mm
  - Mechanism support in 3.0 mm galvanised steel sheet
  - Protected solid steel upper guide rail, 4.0 mm
  - Aluminium sill
  - Brushless motorisation
  - Control and position monitoring : SLYCMA VF control board
  - Inter-floor locking device
  - Number of starts per hour : > 360
- Vandal-resistant option Level 2 including :  
Anti-climb steel sheet + panel boxing




### 3PSO – Car door overall dimensions

Dimensions in mm


Clear Opening (CO)	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800
Clear Height (CH)	2000 to 3000 depending on the clear opening											
Operator overall dimensions	1034	1667	1301	1434	1566	1701	1834	1982	2116	2249	2382	2516
Operator height (mm)	440											
Car door locking												
Fixing height under console	0 mini - 350 maxi											
Operator width	160											
Standard sill width	135											
Cells barrier	Fixed											

# THE GAIA RANGE


## Finishes




RAL 9005  
standard



Leather-grain  
stainless steel



Linen-textured  
stainless steel



Brushed  
stainless steel

Others finishes  
Please contact us

## Benefits

- Guaranteed aesthetics with no visible spot welding marks
- Wide range of finishes available
- Lintel brushing direction identical to that of the uprights
- Simplified maintenance
- Quiet and robust operation
- Landing doors adaptable to existing retained car doors

## Certifications

Certifications	GAIA
EN 81-58	<b>E 120 - EW 60</b>
EN 81-20 / 50	
EN 81-21	
EN 81-70	
EN 81 - 71 - Cat. 2	
2014/33/UE	

## Environments

Industry

Airports

Hotels

Hospitals

Shopping centers

Offices

Public facilities

Social housing



Slycma is a signatory of the Code of Good Practice established by the French Lift Federation, to which it has belonged since its creation.



**Our quality approach :**

Certified ISO 9001 and ISO 14001, Slycma is also regularly audited by its customers.

### Contact details

**LYON Headoffice :** 235 rue du Général de Gaulle - 69530 Brignais - Tél. : +33 (0)4 78 86 81 00 - slycma@slycma.com

**PARIS Agencies :** 34 route de Longjumeau - 91380 Chilly Mazarin - Tél. : +33 (0)1 69 79 32 10 - magasin.mazarin@slycma.com

16 rue Maurice Thorez - 93200 SAINT DENIS - Tél. : +33 (0)1 48 23 91 92

# GAIA SOLID PANEL

4 Panel Central Opening



Création SLYCMA 2025 - Photos Fabrice Ferrer - SLYCMA - Photos et illustrations non contractuelles.  
Sous réserve de modifications. Reproductions, même partielle, interdite.



We've got the perfect door to suit your lift !



Creation




Modernisation

# GAIA 4PCO

## Landing doors

### Key features

- Frame thickness 1.5 mm + internal reinforcements
- Panels thickness 1.5 mm + internal reinforcements
- Mechanism support in 2.5 mm galvanised steel
- Upper guide rail in 4 mm protected solid steel
- Trolley in 4 mm galvanised steel
- Aluminium sill in steel cradle
- EN 81-21 contacts (optional)
- Panel closing by counterweight
- Vandal-resistant Level 2 option including :  
Anti-grip sheet + reinforced panels + contact cover + locking of the unlocking triangle.

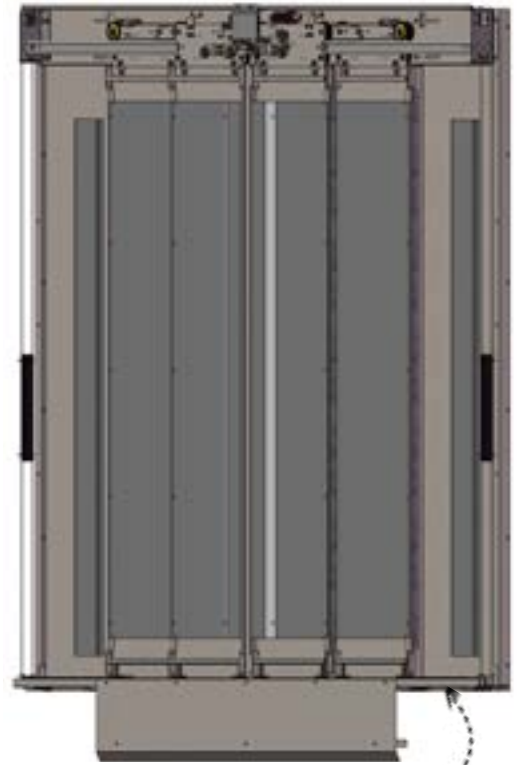

Vandal-resistant option

### 4PCO – Landing door overall dimensions

Dimensions in mm

Clear opening (CO)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500
Clear Height (CH)	2000 to 3000 depending on the clear opening															
Lintel height	200															
Reduced frame overall dimensions	1650	1800	1950	2100	2250	2400	2550	2700	2850	3000	3150	3300	3450	3600	3750	3900
Full facade overall dimensions	1650	1800	1950	2100	2250	2400	2550	2700	2850	3000	3150	3300	3450	3600	3750	3900
Structural opening for reduced frame	1270	1370	1470	1570	1670	1770	1870	1970	2070	2170	2270	2370	2470	2570	2670	2770
Structural opening for full facade	1700	1850	2000	2150	2300	2450	2600	2750	2900	3050	3200	3350	3500	3650	3800	3950
Structural opening height	CH + 230 mm															
Door thickness (mm)	155															
Panel return	Counterweight															

### Key features

- Panels thickness : 1.5 mm
- Mechanism support in 3.0 mm galvanised steel sheet
- Protected solid steel upper guide rail, 4.0 mm
- Aluminium sill
- Brushless motorisation
- Control and position monitoring : SLYCMA VF control board
- Inter-floor locking device
- Number of starts per hour : > 360
- Vandal-resistant option Level 2 including :  
Anti-climb steel sheet + panel boxing




### 4PCO – Car door overall dimensions

Dimensions in mm


Clear Opening (CO)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500
Clear Height (CH)	2000 to 3000 depending on the clear opening															
Operator overall dimensions	1600	1750	1900	2050	2200	2380	2530	2680	2830	2980	3130	3280	3430	3580	3730	3880
Operator height (mm)	440															
Operator width	114 (120 including motor)															
Car door locking																
Fixing height under console	0 mini - 350 maxi															
Standard sill width	90															
Cells barrier	Fixed															

# THE GAIA RANGE


## Finishes




RAL 9005  
standard



Leather-grain  
stainless steel



Linen-textured  
stainless steel









Brushed  
stainless steel

Others finishes  
Please contact us

## Benefits

- ✔ Guaranteed aesthetics with no visible spot welding marks
- ✔ Wide range of finishes available
- ✔ Lintel brushing direction identical to that of the jambs
- ✔ Simplified maintenance
- ✔ Quiet and robust operation
- ✔ Landing doors adaptable to existing retained car doors

## Certifications

Certifications	GAIA
EN 81-58	 <b>E 120 - EW 60</b>
EN 81-20 / 50	
EN 81-21	
EN 81-70	
EN 81 - 71 - Cat. 2	
2014/33/UE	

## Environments

Industry

Airports

Hotels

Hospitals

Shopping centers

Offices

Public facilities

Social housing



Slycma is a signatory of the Code of Good Practice established by the French Lift Federation, to which it has belonged since its creation.



**Our quality approach :**

Certified ISO 9001 and ISO 14001, Slycma is also regularly audited by its customers.

### Contact details

**LYON Headoffice :** 235 rue du Général de Gaulle - 69530 Brignais - Tél. : +33 (0)4 78 86 81 00 - slycma@slycma.com

**PARIS Agencies :** 34 route de Longjumeau - 91380 Chilly Mazarin - Tél. : +33 (0)1 69 79 32 10 - magasin.mazarin@slycma.com

16 rue Maurice Thorez - 93200 SAINT DENIS - Tél. : +33 (0)1 48 23 91 92

# GAIA SOLID PANEL

6 Panel Central Opening Landing door



Création SLYCMA 2025 - Photos Fabrice Ferrer - SLYCMA - Photos et illustrations non contractuelles.  
Sous réserve de modifications. Reproductions, même partielle, interdite.



We've got the perfect door to suit your lift !



Creation




Modernisation

# GAIA 6PCO

## Landing doors

### Key features

- Frame thickness 1.5 mm + internal reinforcements
- Panels thickness 1.5 mm + internal reinforcements
- Mechanism support in 2.5 mm galvanised steel
- Upper guide rail in 4 mm protected solid steel
- Trolley in 4 mm galvanised steel
- Aluminium sill in steel cradle
- EN 81-21 contacts (optional)
- Panel closing by counterweight
- Vandal-resistant Level 2 option including :  
Anti-grip sheet + reinforced panels + contact cover + locking of the unlocking triangle.

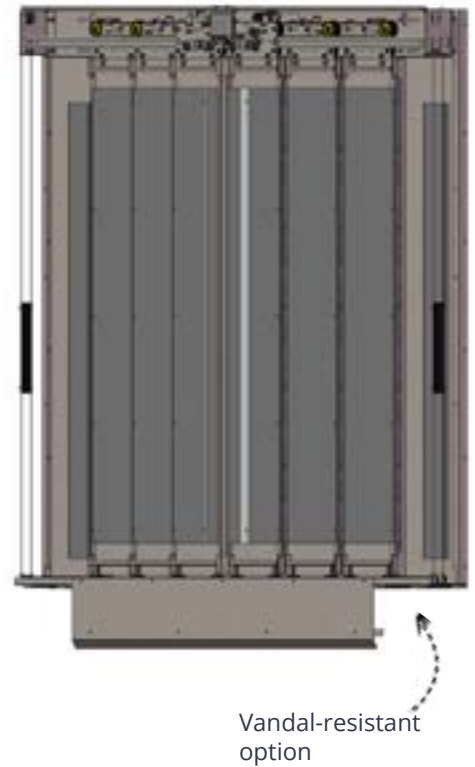

### 6PCO – Landing door overall dimensions

Dimensions in mm

Clear opening (CO)	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000
Clear Height (CH)	2000 to 3000 depending on the clear opening																
Header height	200																
Reduced frame overall dimensions	2016	2150	2283	2416	2550	2683	2816	2950	3083	3216	3350	3483	3616	3750	3883	4016	4150
Full facade overall dimensions	2016	2150	2283	2416	2550	2683	2816	2950	3083	3216	3350	3483	3616	3750	3883	4016	4150
Structural opening for reduced frame	1670	1770	1870	1970	2070	2170	2270	2370	2470	2570	2670	2770	2870	2970	3070	3170	3270
Structural opening for full facade	2066	2200	2333	2466	2600	2733	2866	3000	3133	3266	3400	3533	3666	3800	3933	4066	4200
Structural opening height	CH + 230 mm																
Door thickness (mm)	200																
Panel return	Counterweight																

# GAIA 6PCO

## Car doors

### Key features

- Panels thickness : 1.5 mm
  - Mechanism support in 3.0 mm galvanised steel sheet
  - Protected solid steel upper guide rail, 4.0 mm
  - Aluminium sill
  - Brushless motorisation
  - Control and position monitoring : SLYCMA VF control board
  - Inter-floor locking device
  - Number of starts per hour : > 360
- Vandal-resistant option Level 2 including :  
Anti-climb steel sheet + panel boxing




### 6PCO – Car door overall dimensions

Dimensions in mm


Clear Opening (CO)	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000
Clear Height (CH)	2000 à 3000 suivant Passage libre																
Operator overall dimensions	1967	2100	2232	2367	2530	2663	2797	2930	3063	3197	3300	3463	3597	3730	3863	3997	4130
Operator height	440																
Operator width	160																
Car door locking	🟢																
Fixing height under console	0 mini - 350 maxi																
Standard sill width	135																
Cells barrier	Fixed																

# THE GAIA RANGE


## Finishes



RAL 9005  
standard



Leather-grain  
stainless steel



Linen-textured  
stainless steel



Brushed  
stainless steel

Others finishes  
Please contact us

## Benefits

- Guaranteed aesthetics with no visible spot welding marks
- Wide range of finishes available
- Lintel brushing direction identical to that of the jambs
- Simplified maintenance
- Quiet and robust operation
- Landing doors adaptable to existing retained car doors

## Certifications

Certifications	GAIA
EN 81-58	<b>E 120 - EW 60</b>
EN 81-20 / 50	
EN 81-21	
EN 81-70	
EN 81 - 71 - Cat. 2	
2014/33/UE	

## Environments

Industry

Airports

Malls

Hospitals

Museums

Performance halls



Slycma is a signatory of the Code of Good Practice established by the French Lift Federation, to which it has belonged since its creation.



**Our quality approach :**

Certified ISO 9001 and ISO 14001, Slycma is also regularly audited by its customers.

### Contact details

**LYON Headoffice :** 235 rue du Général de Gaulle - 69530 Brignais - Tél. : +33 (0)4 78 86 81 00 - slycma@slycma.com

**PARIS Agencies :** 34 route de Longjumeau - 91380 Chilly Mazarin - Tél. : +33 (0)1 69 79 32 10 - magasin.mazarin@slycma.com

16 rue Maurice Thorez - 93200 SAINT DENIS - Tél. : +33 (0)1 48 23 91 92