



# PAC 85

EN 81-20/50


MULTIPANEL ARTICULATED CAR DOOR



# PAC 85

## MULTIPANEL ARTICULATED SLIDING CAR DOOR

Its field of application is lifts: industry, shopping malls, hoists, hoists and all appliances requiring high levels of resistance, maximum free passage and reduced bulk. Usually used for unaccompanied lifts, it does not drive the landing door in standard operation. However, this option is available.

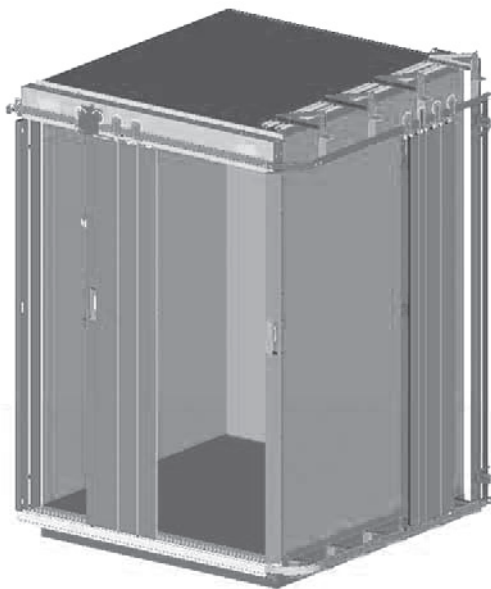

Optional automated version

### Control by frequency variation :

- **Pleasant** to use
- Compact **design**
- Proven and standardised technology
- **Fast and easy** commissioning
- **Adaptable** to all uses
- Consideration of the environment
- Means to maintain the unit in operation
- The guarantee to be in compliance with current standards and legislation
- Automatic stroke programming

### PAC 85 car door dimensions

	MINI	MAXI
Clear Opening (CO)	700	3000
Clear Height (CH)	1900	3000

Pictures for illustration purpose only - SLYCMA production 2017

In compliance with standard  
**EN 81-20/50**  
Ideal for **Goods Lifts** and  
**Car Lifts**




- Standard operation with SLYCMA landing doors
- Highly robust
- Reinforced threshold and sheet metal
- Waterproof version available

### Options available

- Stainless steel
- Waterproof or explosion-proof version
- PAC 81 manual landing door drive
- Supply of car entrance

### Finitions standard



Primer



304 L or 316 L  
rough st. steel\*

\*With extra cost



**SLYCMA Head office**  
Parc d'activité du Dôme  
4 route du Dôme  
69630 Chaponost  
FRANCE  
Tél. : +33 (0)4 78 86 81 00  
Fax : +33 (0)4 78 86 81 08

**SLYCMA Paris**  
34 route de Longjumeau  
91380 Chilly-Mazarin  
FRANCE  
Tél. : +33 (0)1 69 79 32 10  
Fax : +33 (0)1 69 79 32 15

[www.slycma.com](http://www.slycma.com)