



SD20



LIFT DOORS




SD 20 2VOL

2 panels side opening

Unparalleled robustness. Less breakdowns

AUTOMATIC LANDING DOOR

- Sheet thickness 1.5 mm
- Reinforced mechanism with solid steel guide rail
- rail
- Mounting plate thickness : 3 mm
- Reinforced panels with 19 mm insulation panel
- Panels are linked by spring closers
- Opacifying glass option available

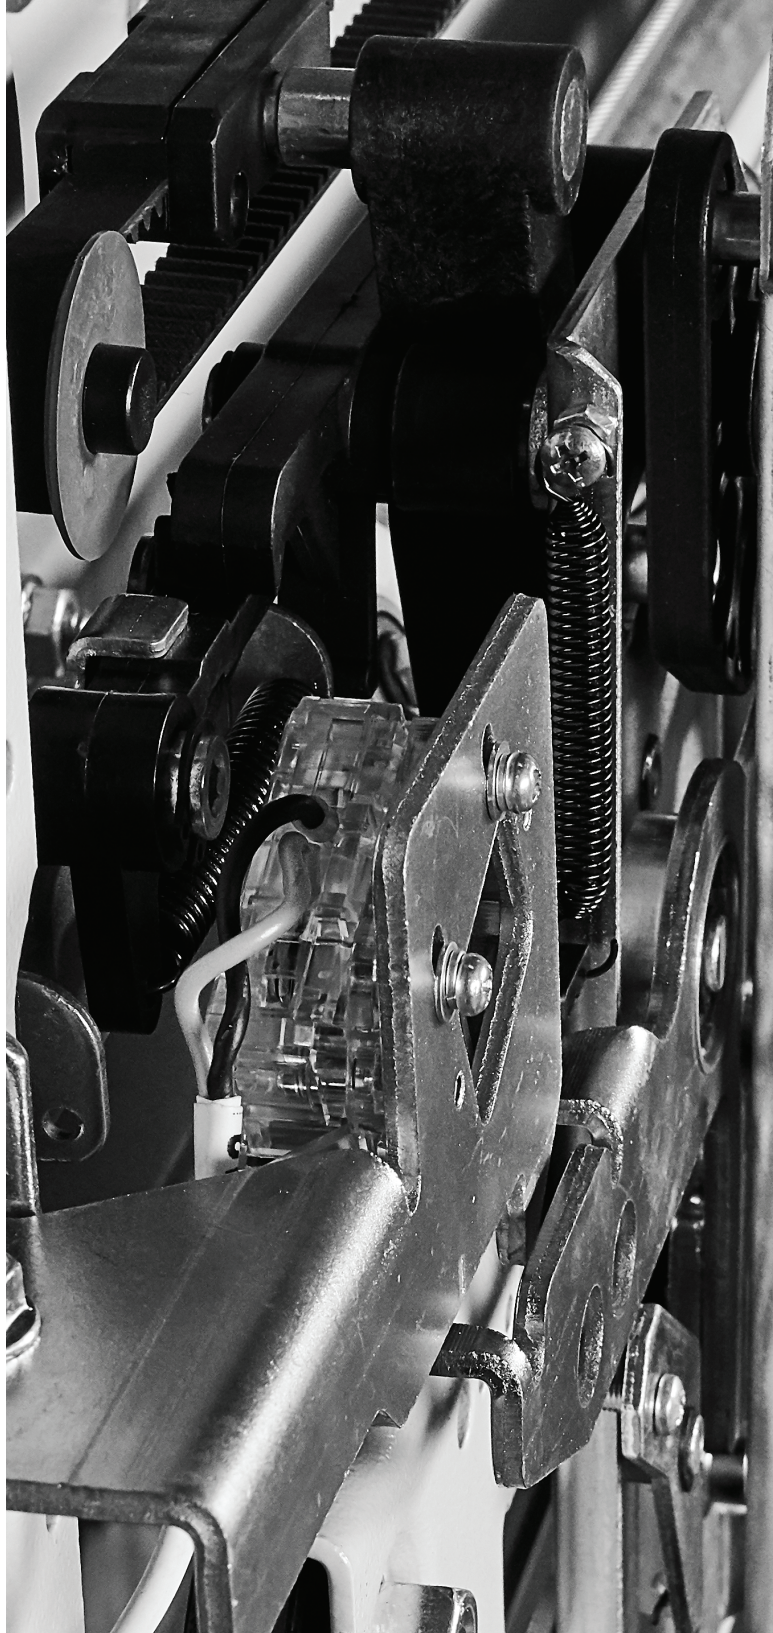

Automatic landing door dimensions 2VOL

DIMENSIONS IN MM

Clear opening (PL)		700	800	900	1000	1100	1200	1300
Clear Height(HL)		2000 - 2100 - 2200 - 2300						
Header height		210						
Modernisation	Small facade overall dimensions	1250	1400	1550	1700	1850	2000	2150
	Full facade overall dimensions	1300	1450	1550	1700	1850	2000	2150
	Rough opening for small frame	1050	1150	1250	1350	1450	1550	1650
Creation	Rough opening for complete facade	1350	1500	1600	1750	1900	2050	2200
	Gross bay height	HL + 240						





- Reduced door operator height
- Reinforced panel thickness 1.5mm
- Opacifying glass option available
- Reinforced mounting plate thickness : 3mm
- Reinforced mechanism with solid steel guide rail
- Mechanical locking device
- PM motor
- Belt driven
- Number of annual cycles: > 3,000,000
- Number of starts hours: > 360



Car door dimensions 2VOL


2 panels central opening

- Sheet thickness 1.5 mm
- Reinforced mechanism with solid steel guide rail
- Mounting plate thickness : 3 mm
- Reinforced panels with 19 mm insulation panel
- Panels are linked by spring closers
- Opacifying glass option available



DIMENSIONS IN MM

Modernisation	Clear opening (PL)	700	800	900	1000	1100	1200	1300
	Clear Height(HL)	2000 - 2100 -2200 - 2300						
	Header height	210						
	Smal l facade overall dimensions	1504	1704	1904	2104	2304	2504	2704
	Full facade overall dimensions	1600	1740	1900	2100	2300	2500	2700
Creation	Rough opening for small frame	1050	1150	1250	1350	1450	1550	1650
	Rough opening for complete facade	1650	1790	1950	2150	2350	2550	2750
	Gross bay height	HL + 240						

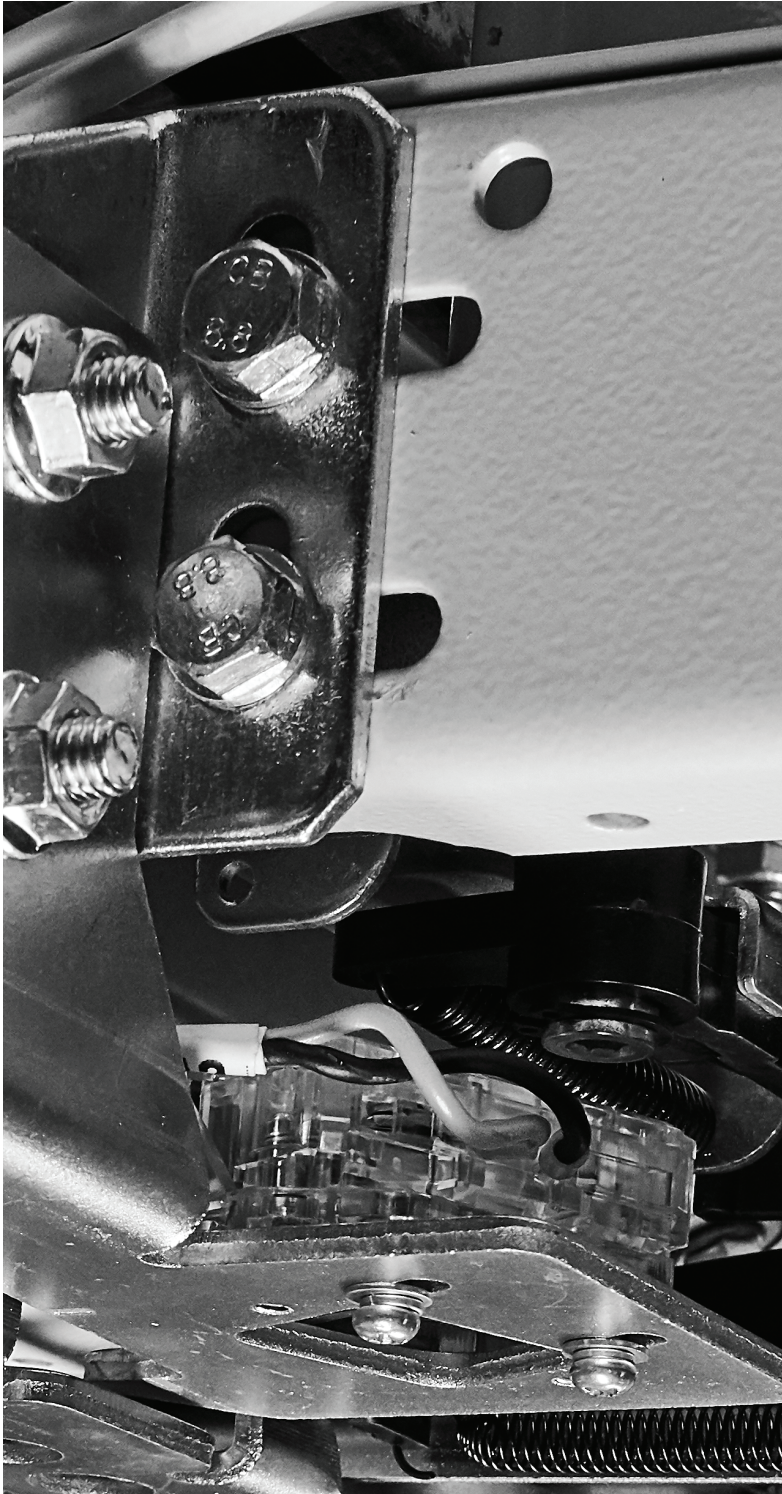

SD 20 2VOC

2 panels central opening

AUTOMATIC CAR DOOR

- Reduced door operator height
- Reinforced panel thickness 1.5mm
- Opacifying glass option available
- Reinforced mounting plate thickness : 3mm
- Reinforced mechanism with solid steel guide rail
- Mechanical locking device
- PM motor
- Belt driven
- Number of annual cycles: > 3,000,000
- Number of starts hours: > 360


Car door dimensions 2VOC

DIMENSIONS IN MM

Clear opening (PL)	700	800	900	1000	1100	1200
Clear height (HL)	2000 - 2100 -2200 - 2300					
Operator width	1470	1670	1870	2070	2270	2470
Operator height	417,5					
Height above drive	HL + 240					
Sill width	54					



SD 20



key features

What makes the SD20 door the robust door available at an unbeatable price ?

1. The EN 81-20/50 standard as a guideline for its design.
2. Taking into account the expectations of our customers to have a product made to last.
3. Quiet operation.
4. A perfect aesthetic and the use of AISI 304 stainless steel.
5. Easy and quick maintenance.
6. Reliability and endurance.
7. Core range available from stock.



EN 81-20
EN 81-71
EN 81-58 E120




FINISHES

RAL 7032




Option
Inox AISI 304
Leather

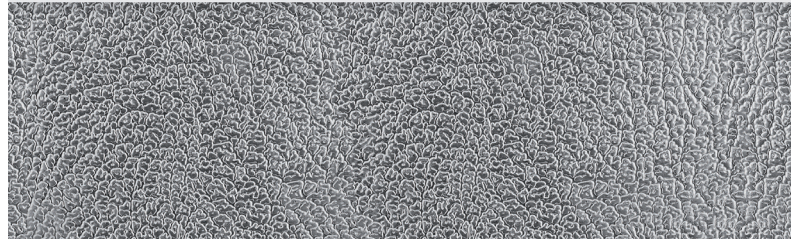


Option
Inox AISI 304
brushed



Option
Inox AISI 304
Linen

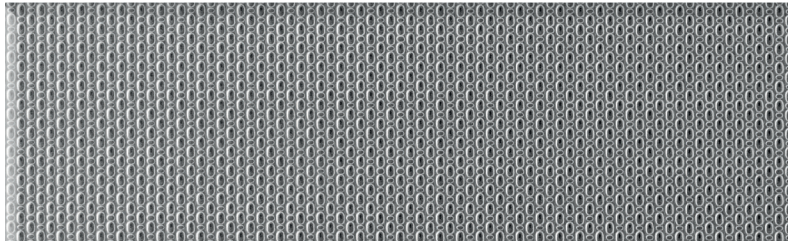

Option
Glazing
opacifying glass

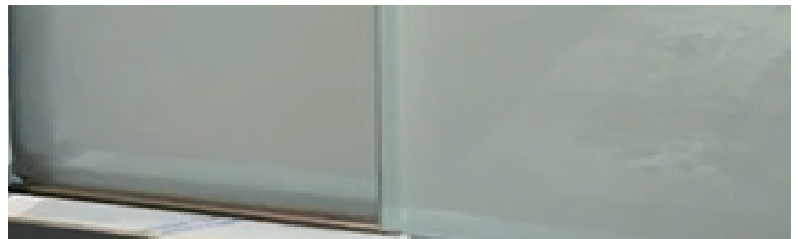

Option
Glazing
flush glass
with frame



To contact us

LYON / Head office

4 route du Dôme
69630 Chaponost
Tél. : +33 (0)4 78 86 81 00
slycma@slycma.com

PARIS / Agencies

34 route de Longjumeau
91380 Chilly Mazarin
Tél. : +33 (0)1 69 79 32 10
magasin.mazarin@slycma.com

16 rue Maurice Thorez
93200 Saint Denis
Tél. : +33 (0)1 48 23 91 92