

FOLDING LANDING & CAR DOOR

4 PANELS
CENTRAL OPENING



LIFT DOORS



4 folding panels central opening

- Flat lock
- Compact
- Quiet
- EN81-20
- Aluminium hinges, available in anodised or RAL execution
- Sheet metal, glass finish or RAL execution of panels






Figure 1



© 2006 The Authors
Journal compilation © 2006 Blackwell Publishing Ltd

the authors are not aware of any other studies that have examined the effects of the use of a single, non-validated, self-report measure of perceived effort on the relationship between perceived effort and the other variables of interest.

A tall, narrow, white-framed window with multiple vertical panes and a central handle. The window is set against a dark background. It features a central vertical handle and several smaller handles on the side panes. The frame is white and the panes are dark.

A tall, narrow window with four vertical panes and a dark frame. The window is set into a light-colored wall. The panes are separated by dark vertical muntins. The frame is dark and has a simple, clean design. The window is positioned in the upper half of the page, above a row of three smaller windows.



A black and white photograph of a closed double door. The door features two vertical glass panels separated by a central handle. The handle is a long, thin vertical rod with a small, dark, rectangular pull at the bottom. The door is set within a dark frame, and the background is a light, textured wall.

Space requirement for 4-folding panels landing doors


Clear opening (PL)	500	550	600	650	700	750	800	850	900	Other dimensions Contact us
Width between columns (LT)	572	622	672	722	772	822	872	922	972	
Threshold width	120									
Header height	150									
Uprights	70 (standard) to 150									
Space requirement	See products catalog									

PLYCAB 4VOC

4 folding panels central opening

CAR DOOR


- Flat lock
- Frequency control
- Compact
- Wide range of finishes

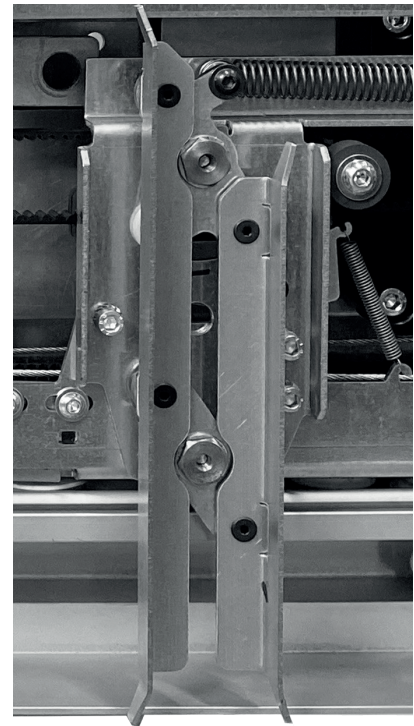

Dimensions of 4-folding panels car door

DIMENSIONS IN MM

Clear opening (PL)	500	550	600	650	700	750	800	850	900	Other dimensions Contact us
Width between columns (LT)	572	622	672	722	772	822	872	922	972	
Threshold width	100									
Operator space requirement	100 x 292 (depth x height)									
Space requirement	See products catalog									

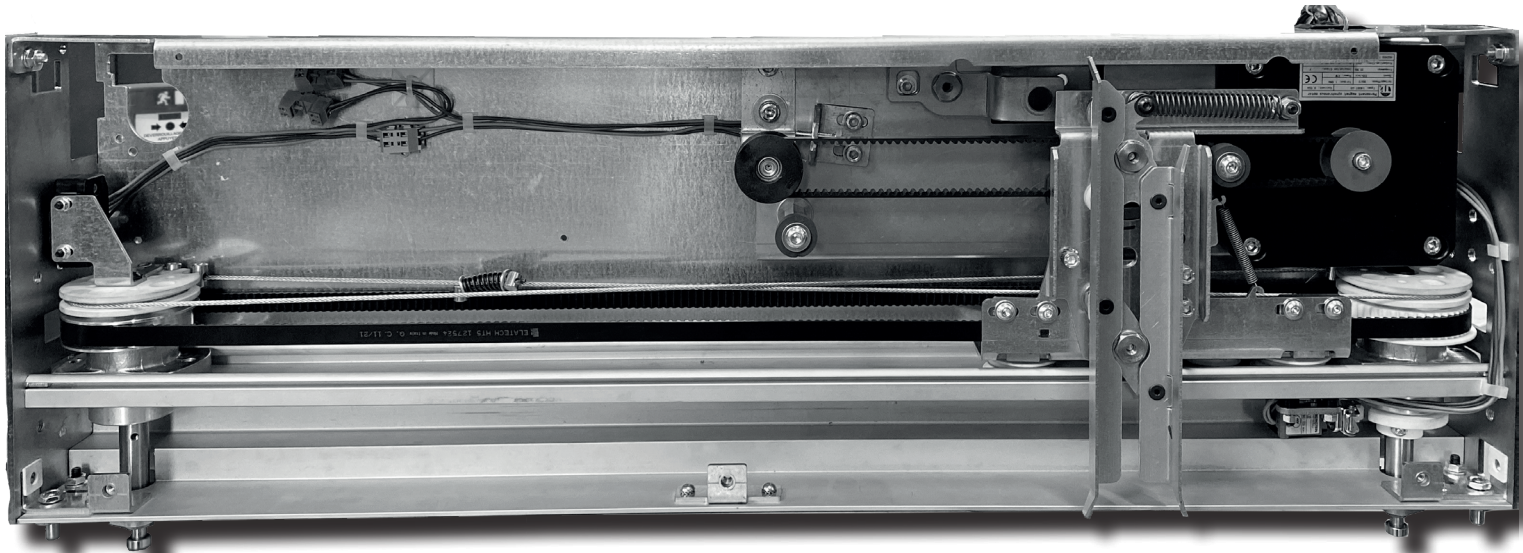

What makes folding doors SLYCMA, the lift doors that that gives you the keys to achieve a successful modernisation ?

Key features



EN 81-20/50

2014/33/UE

EN 81-21 (In option)

1. The flat closing of the door panels,
2. Quiet and smooth operation,
3. Easy to install,
4. Improved accessibility,
5. The opportunity to make bespoke uprights and headers,
6. Maximum reliability thanks to the control card which equips all our car doors,
7. Space saving on the landing,
8. Symmetrical opening,
9. Aesthetics regardless of the finish,
10. The opportunity of replacing an existing swing door,
11. The ability to combine the PLYPAL with existing swing doors on the same elevator,
12. The first EN 81-20 folding door.

