



RETRACTABLE TOE GUARDS

EN 81-20/50

DELTACAP



RETRACTABLE TOE GUARDS

DELTACAP

DELTACAP toe guards comply with the standards for the construction and installation of elevators in existing buildings in the event of insufficient depth of pit.

They are also suitable for the requirement of EN 81-80, which recommends a safety device against fall in shaft of a minimum vertical height of 0.75 m in the position of use.

DELTACAP retractable toe guards fit easily and quickly under the car sill.


They incorporate a safety contact compliant to EN 81-20 / 50 for statement of the complete deployment.



Jack 2 toe guard retracted



William 2

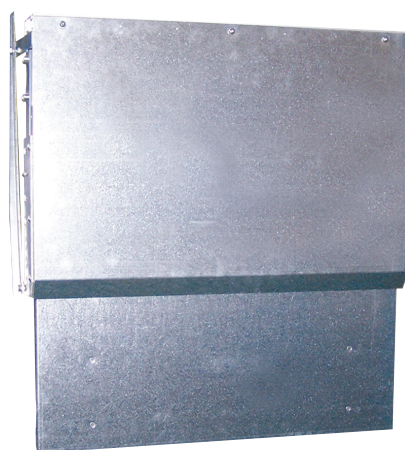

Jack 2 toe guard deployed

DELTACAP retractable toe guards (in mm)

	Pit mini	Heigt mini	Height mini		Safety stop edge
			If damper gap	If damper boom	
Jack 2	660	460	100	100	50
William 2	500	362	100	100	50

Pictures for illustration purpose only - SLYCMA Production 2017

Compliant with
EN 81-20/50 standard



- Clear opening available from 500 to 1300 with a 50 mm pitch
- No contact between panels running
- Silent shock absorber
- Endurance, distortion under push or shock tests, approved

How to choose your retractable toe guard ?

Three important points:

- 1) the depth of the pit*
- 2) crushing of the damper*
- 3) the gap between the car and the damper*



SLYCMA Head office
Parc d'activité du Dôme
4 route du Dôme
69630 Chaponost
FRANCE
Tél. : +33 (0)4 78 86 81 00
Fax : +33 (0)4 78 86 81 08

SLYCMA Paris
34 route de Longjumeau
91380 Chilly-Mazarin
FRANCE
Tél. : +33 (0)1 69 79 32 10
Fax : +33 (0)1 69 79 32 15

www.slycma.com